PCL956427

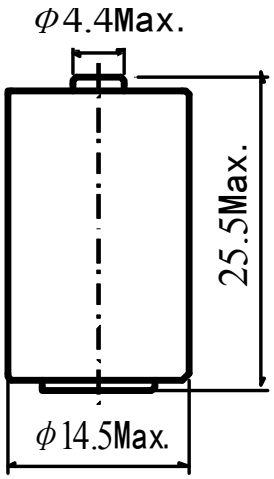

S: Standard termination

Notes:

Dimension: mm

Special terminations can be made as requested.

T: Solder tabs

P: Axial pins

Important Notes

Do not short or charge the battery.

Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.

Do not heat/use the battery beyond the permitted temperature range.

SPECIFICATION：（23±2℃）

Nominal capacity (0.5mA～2V):	1.2AH
Rated voltage：	3.6 V
Max constant current of discharge:	40mA
Max discharge current(pulse)：	80mA
Weight：	11g
Operating temperature range：	-55～85℃

Discharge characteristics at 23±2℃

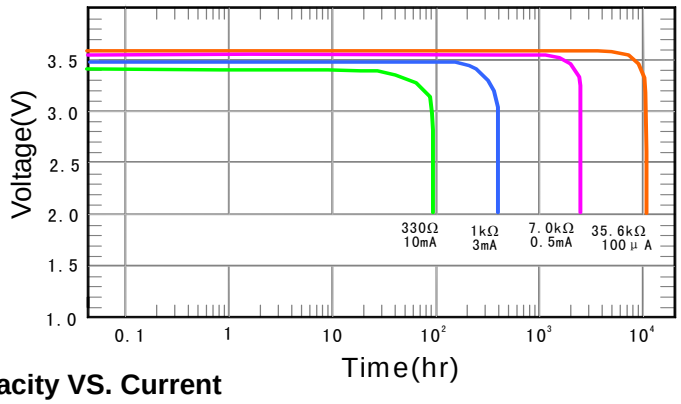

Capacity VS. Current

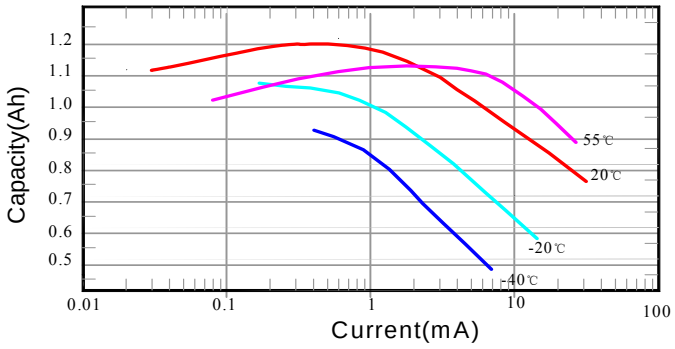

Voltage VS. Temperature

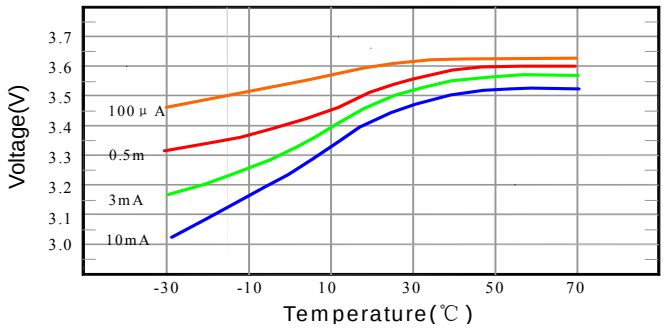

U.L. Component Recognition MH 45782